


φ10mm Flange LEDS

| Part Number | Emitting Material | Wave Length AD(nm) | Emitting Color | Lens Type | V _F (v) Typ. (at 2 | IV(1m) Typ. 20 mA) | Viewing Angle 201/2(°) |
|-------------|----------------------|--------------------------|-------------------|-----------------|-------------------------------|--------------------------|------------------------------|
| CL-10R-0.5W | GaAlAs | 700 | Red | Red Diffused | 2.3 | 5 | 35 |
| CL-10W-1W | GaAsP/GaP | | White | White Diffused | 3.5 | 7 | 35 |
| CL-10G-1W | GaP | 520 | Green | Green Diffused | 2.2 | 9 | 35 |
| CL-10Y-0.5W | GaAsP/GaP | 585 | Yellow | Yellow Diffused | 2.1 | 8 | 35 |
| CL-10B-1W | GaInN | 460 | Blue | Blue Diffused | 3.5 | 7 | 35 |

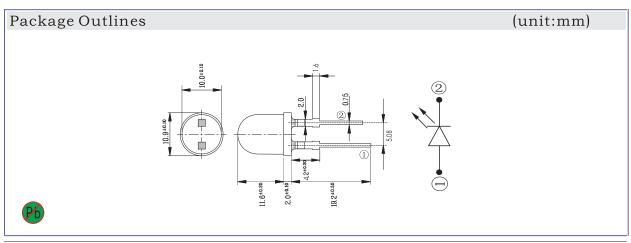

Remark: 1. "\(\triangle^{n}\) represents Internal Circuit Feature: A. C. E...Common Cathode, B. D. F...Common Anode.
2. "\(\pi\)" represents LED Emitted Color.
3. All dimensions are in millimeters, tolerance is 0.25mm unless otherwise noted.
4. Above specification is measured by CHANGLI's test instrument and may be changed without notice.
5. Supplier will reserve authority on material change for above specification.